



EPS-2200

*Semi-automatic single pleating and
Microflex hook insertion machine*



1.



2.



3.



watch the video

1. PEA unit for Microflex hooks
2. Low-power alignment laser
3. Nexio touch screen

- Machine equipped with Brother X-Y feed lockstitch sewing machine, pre-programmed to sew curtain pleats up to 12,5 cm in height.
- Special tack program to attach manual folded double or triple pleats.
- Simple selection of the desired sewing program, speed or thread tension via the Nexio touch screen.
- Fully automatic Microflex curtain hook feed system, with hook height selection in 5 mm increments. The feed system is equipped with a 100-hook container.
- Accurate, easily adjustable low-power alignment laser to monitor even pleat distances.
- Adjustable pleat guide.
 - Pleat depth 20-140 mm
 - Pleat distance 65-185 mm
 - Maximum pleat thickness 18mm
- Optional: Pleat calculation module to easily calculate the pleat depths and distances.
- Optional: patented pleat calculation program for positioning seams as desired (inside or next to the pleat).
- Production capacity: 250 pleats per hour*.
- Technical specifications:
 - Dimensions: 120 x 70 cm
 - Electric: 220 V, 1 phase, 600 W, 16 A
 - Air: 5 bar; 0,8 L per cycle

** capacity strongly dependent on the operator.*

Eisenkolb EPS-2200

Semi-automatic pleating machine


Catalogue (PDF)

Catalogue et fiche technique (PDF)

الكتالوج والمواصفات الفنية (PDF)

Product page

alborj.com/products/eisenkolb-eps-2200

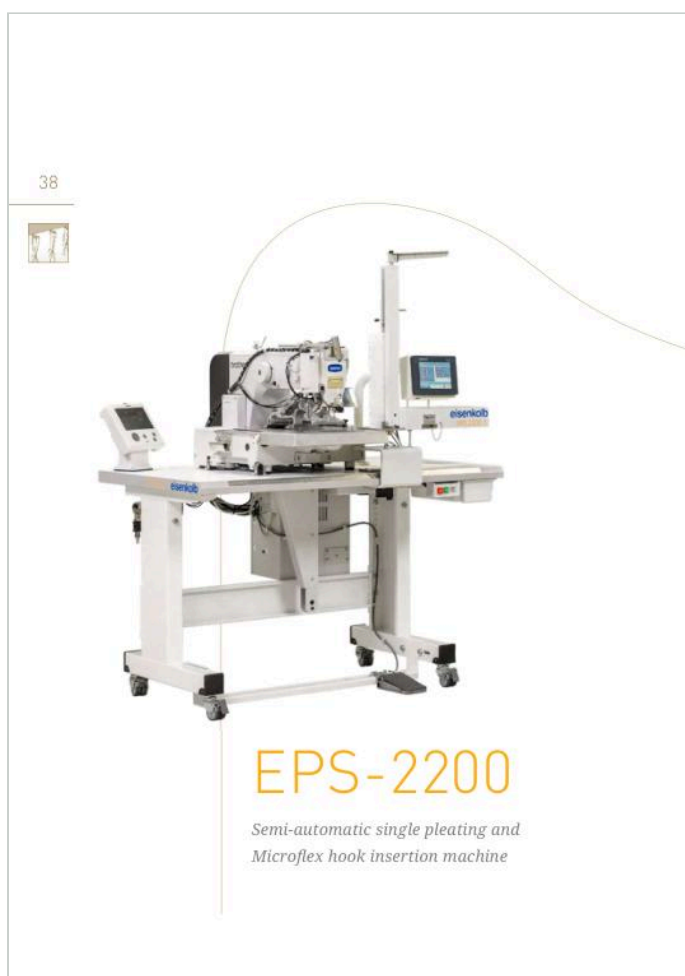

In this catalogue

- 1 The EPS-2200 semi-automatic single pleating and Microflex hook insertion machine
- 2 Features and technical specifications

Page 1, the first page of the maker's catalogue, reproduced unchanged.