

LCWN single needle series

High speed, Cylinder bed, Large vertical axis hook,
Compound feed and walking foot, Reverse stitch, Lockstitch machines



Variety

LCWN-8BL

Standard model

LCWN-8BL-TA

For thick thread

LCWN-8BL-CB

Small sized cylinder edge

LCWN-8BL-CB-TA

Small sized cylinder edge, for thick thread

LCWN-8BLV

Synchronized binder


LCWN-8BLV-CB

Synchronized binder, small sized cylinder edge



Applications


- For sewing medium to heavy weight fabrics, leather, synthetics, canvas and various coated and laminated materials.
- Suitable for sewing tubular and curved work such as shoes, boots, bags and handbags.

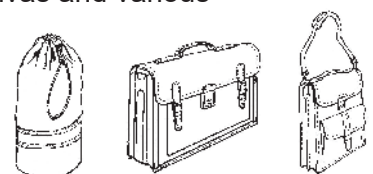

LCWN single needle series

Features (LCWN-□)

- Improved exposure of arm-feeding mechanism components which provides safety environment. (mechanical part of alternating presser foot, foot lifter mechanism(knee lifter) and presser foot spring)
- Semi-automatic lubrication system.
- Large vertical axis hook.
- Safety clutch prevents the hook from being damaged.
- Reverse stitching by stitch adjusting lever.
- Special designed cylinder edge for the special stitching on uneven materials. (**8BL-CB**, **8BL-CB-TA**, **8BLV-CB**)
- Synchronized binder available.(**8BLV**, **8BLV-CB**)
- Automatic presser foot lift (**FL**) available as option.



LCWN-8BL-CB

Specifications (LCWN-□)

Variety		8BL	8BL-CB	8BLV	8BLV-CB	8BL-TA	8BL-CB-TA
Number of needle		Single needle					
Max. sewing speed		2,000 s.p.m.				1,800 s.p.m.	
Max. stitch length		1/4" (6.5 mm)					
Clearance under presser foot	by knee	5/8" (16 mm)					
	by hand	21/64" (8.5 mm)					
Needle bar stroke		1-25/64" (35.4 mm)					
Needle(standard)		DPx17 (#22) , 135x17 (#140)				DPx17 (#25) , 135x17 (#200)	
Thread		#8 (standard)				#0 (Upper & Lower thread)	
Hook		Large vertical axis hook (2.0 times)					
Amount of lift of walking foot		1/8"-15/64" (3.2 - 6 mm) standard 1/8" (standard 3.2 mm)					
Thread take up lever		Slide type					
Lubrication		Semi-automatic lubrication type					
Bobbin size		Φ 1-9/64" (Φ 29 mm), t=31/64"(12.4mm)					
Cylinder size		3-1/32"(77 mm) dia.					
Working space		10-5/32"x 4-21/64" (258 x 110 mm)					
Net weight(Head only)		33 Kg				34 Kg	

NOTE: (1) Speed depends on threads, materials and type of operation

(2) Specifications subject to change without notice



SEIKO SEWING MACHINE CO., LTD.

2-13-6, Sakaecho, Funabashi-shi
Chiba Prefecture, 273-0018, Japan

Phone : +81-47-420-3561 (Overseas dept.)

Fax : +81-47-420-3560

E-mail : exsales@seiko-sewing.co.jp

Printed in Japan 2026. 6

<https://www.seiko-sewing.co.jp/en/>

Seiko LCWN-8BL

Cylinder bed walking foot machine

Catalogue (PDF)

Catalogue et fiche technique (PDF)

الكتالوج والمواصفات الفنية (PDF)

Product page

alborj.com/products/seiko-lcwn-8bl

SEIKO

LCWN single needle series
High speed, Cylinder bed, Large vertical axis hook,
Compound feed and walking foot, Reverse stitch, Lockstitch machines



LCWN-8BL-CB-TA

Variety

- LCWN-8BL**
Standard model
- LCWN-8BL-TA**
For thick thread
- LCWN-8BL-CB**
Small sized cylinder edge
- LCWN-8BL-CB-TA**
Small sized cylinder edge, for thick thread
- LCWN-8BLV**
Synchronized binder
- LCWN-8BLV-CB**
Synchronized binder, small sized cylinder edge



LCWN-8BL

Applications

- For sewing medium to heavy weight fabrics, leather, synthetics, canvas and various coated and laminated materials.
- Suitable for sewing tubular and curved work such as shoes, boots, bags and handbags.



In this catalogue

- 1 The LCWN single needle cylinder bed series, models and applications
- 2 Features and specifications

Page 1, the first page of the maker's catalogue, reproduced unchanged.